

CODE	MODEL	TYPE	POWER SUPPLY	SERIES
80300689	BRTN702LI-4C	REFRIGERATED COUNTER	ELECTRIC	MILO REFRIGERATION

DESCRIPTION

COUNTER CHIL. 1200 D.IN 2+2 DRAWERS -2/+7°C BUILT-IN CONDENSING UNIT
TECHNICAL DATA

Electric power (kW)	0.13
Standard voltage* (kW)	230/1/50
Power absorbed (Amp)	3.8
Refrigerating power (W)	362
IPX Protection Grade (mm)	IPX4
Insulation thickness (mm)	50
Noise (db) 5m	42
Daily energy consumption (kWh)	4
Annual energy consumption (kWh/annum)	1364
Climate class	5
Energy efficiency class	D
Compressor	EMC3117U
Controller	EV3B
Temperature range	-2/+7°C

DIMENSIONS DATA

Product dimensions (mm)	1200W x 685 P x 624 H
Internal dimensions (mm)	325x530x250
Net weight (kg)	93
Gross weight (kg)	114
Packaging dimensions (m3)	1220 x 705 x 700
Packaging volume (m3)	86.08


CONSTRUCTIONAL FEATURES

Stainless steel AISI 304 ventilated refrigerated counters on feet or castors. 700 mm of depth, body height H 443 mm; 2 or 3 doors GNI/1 with full (mod. 2C or 3C) or 1/2 drawers (mod. 4C or 6C) per door with full extraction drawers. Built unit, versions with straight worktop H40mm or without top (mod. LI). Digital controller. Inner bottom panel with rounded corners. Automatic systems for defrosting and evaporation of the condensation water.

ACCESSORIES(not included)


Code	Model	Description
80300706	4W_COUNTER	CASTORS KIT FOR REFRIG. COUNTER
80300707	SV_COUNTER	SUPL. SPECIAL VOLTAGE 220V/6Hz ONLY FOR REFRIGERATED COUNTER

CODE	MODEL	TYPE	POWER SUPPLY	SERIES
80300689	BRTN702LI-4C	REFRIGERATED COUNTER	ELECTRIC	MILO REFRIGERATION

DESCRIPTION

COUNTER CHIL. 1200 D.IN 2+2 DRAWERS -2/+7°C BUILT-IN CONDENSING UNIT

TECHNICAL DRAWING

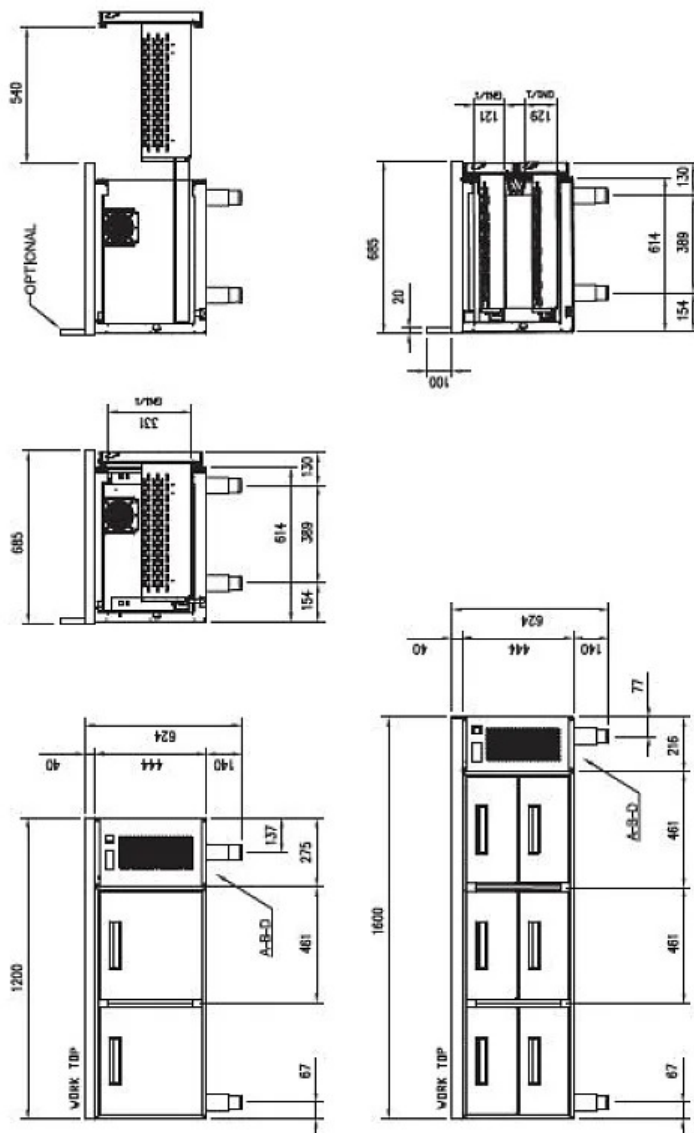

CONNECTIONS

G = GAS	R290 - GWP 3 - Kg 0,080
E = ELECTRIC	230/1/50