

CODE	MODEL	TYPE	POWER SUPPLY	SERIES
10191002	M9CQE04	GAS RANGE	ELECTRIC	MILO 900

DESCRIPTION

ELECTRIC RANGE WITH 4 SQUARE PLATES AND OPEN BASE

TECHNICAL DATA

Electric power (kW)	16
Standard voltage* (kW)	380-415 V 3 N ~
N° of cooking zones	4X4,0kW
IPX Protection Grade (mm)	IPX4

DIMENSIONS DATA

Product dimensions (mm)	800W x 900 P x 900 H
Net weight (kg)	120
Gross weight (kg)	140
Packaging dimensions (m3)	845 x 972 x 1264
Packaging volume (m3)	1.04



CONSTRUCTIONAL FEATURES

Worktop made of 2mm-thick AISI 304 stainless steel with Scotch Brite finish. Control panel, side panels and back panel in 1mm thick AISI 304 stainless steel with Scotch Brite finish. Precise juxtaposition of worktops ensuring maximum hygiene. Stainless steel brackets are provided as standard, allowing the appliances to be effectively fixed side by side (optional gasket). Sloping back guard with built-in exhaust grate and removable steel closing grid. Adjustable feet made of AISI 304 stainless steel with scratch-resistant sole made of insulating plastic material. Foot extension 60mm, standard worktop height 900mm (minimum 895, maximum 955).

TECHNICAL FEATURES

300x300 mm, cast-iron, square hotplates of 4.0 KW, power adjustable to 6 operating positions. Anti-spill, molded, water-tight plate to prevent the passage of dirt. Ergonomic, athermic control knobs with built-in operating LED. Lower open compartment made of AISI 304 stainless steel.

ACCESSORIES(not included)


Code	Model	Description
825883	PALS-8IF	SMO. GRID 1 BURNER PALS-8IF
825893	PARS-8IF	RIB. GRID 1 BURNER PARS-8IF
831607	GCF-9/7	CHROM. OVEN GRID "N" S.900 530X650
831647	GCFM-9/7	MAXI XL OVEN GRID 700S/980S 645X974
440107	GV-900	CERAM. GRID 2B. S.90 GV-900 378X396
20100592	M9VNC80	M9VNC80 MODULE HEATING
20100597	M9VNC80-R	M9VNC80-R MODULE HEATING+SHELF
831733	RID-9/7	REDUC. CHR. GRID RID-9/7

CODE	MODEL	TYPE	POWER SUPPLY	SERIES
10191002	M9CQE04	GAS RANGE	ELECTRIC	MILO 900

DESCRIPTION

ELECTRIC RANGE WITH 4 SQUARE PLATES AND OPEN BASE

TECHNICAL DRAWING

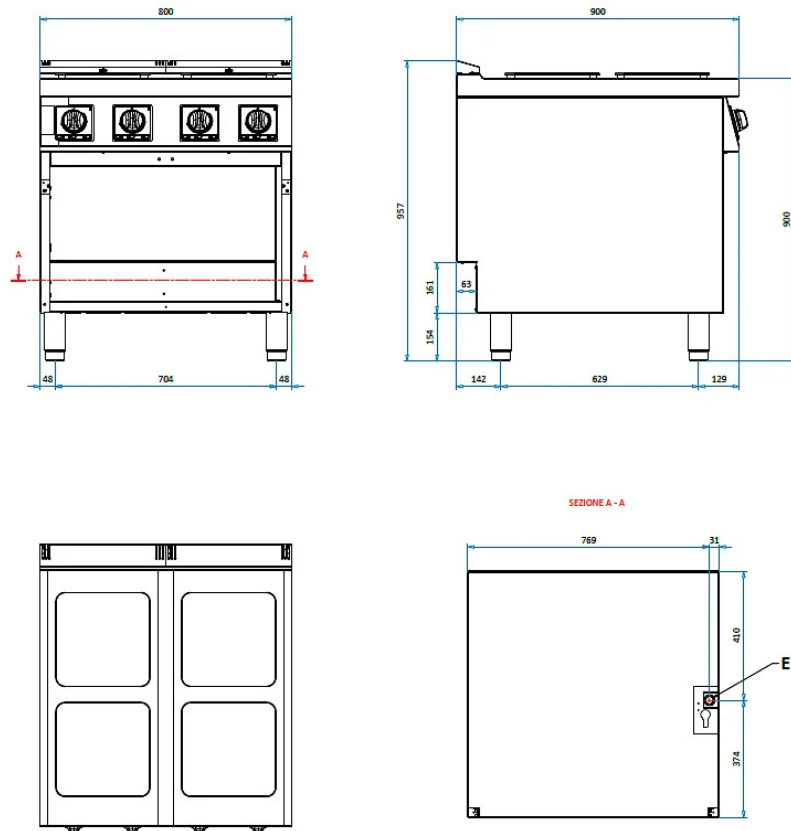

CONNECTIONS

E = ELECTRIC 380-415 V 3 N ~